




1	2	3	4	5		6
			REVISIONS			
LTR	DESCRIPTION		DATE	REV.	CHKD.	APVD.







3D VIEW


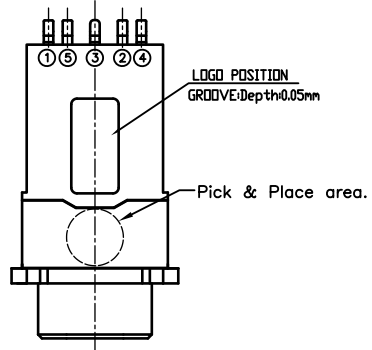


COPLANARITY OF DETAIL A
SCALE : 2:1


- SPECIFICATIONS:**
1. RATED VOLTAGE AND CURRENT: 30VDC 0.3A.
 2. WITHSTAND VOLTAGE: 500VAC FOR 1 MINUTE.
 3. INSULATION RESISTANCE: 100MΩ MIN.
 4. CONTACT RESISTANCE: 50mΩ MAX. (INITIAL).
 5. INSERTION AND EXTRACTION FORCE: 3N TO 35N.
 6. LIFE: 5000 CYCLES MIN.
 7. WATERPROOF GRADE: IPX7.
 8. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.

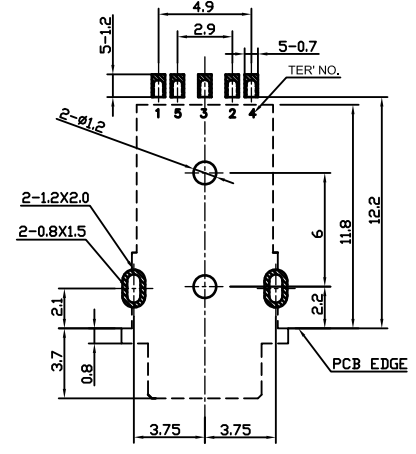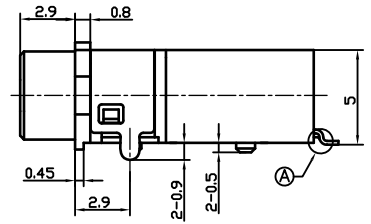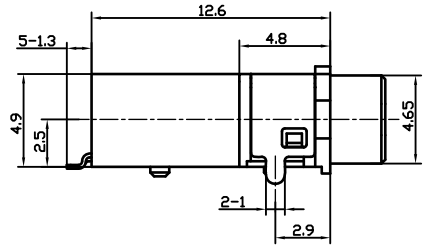




RECOMMENDED PCB MOUNTING HOLES
(TOP VIEW)(tolerance±0.05)

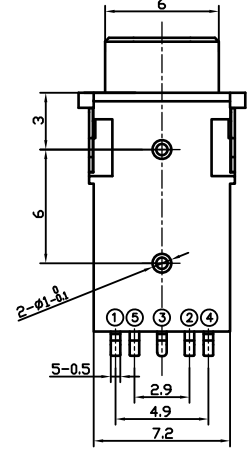

CHASSIS MOUNTING HOLES
Panel cut out (Front side)

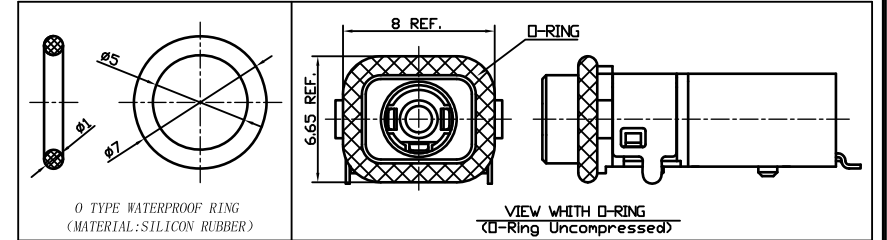

⑧	COVER		1	PA9T BLACK	
⑦	HOUSING		1	PA9T BLACK	
⑥	SHIELD		1	BRASS	Sn-PLATED
⑤	5# TERMINAL	5	1	PHOSPHOR BRONZE	Au-PLATED
④	4# TERMINAL	4	1	PHOSPHOR BRONZE	Au-PLATED
③	3# TERMINAL	3	1	PHOSPHOR BRONZE	Au-PLATED
②	2# TERMINAL	2	1	PHOSPHOR BRONZE	Au-PLATED
①	1# TERMINAL	1	1	PHOSPHOR BRONZE	Au-PLATED
NO.	PART NAME	TER NO.	QTY	MATERIAL	FINISH

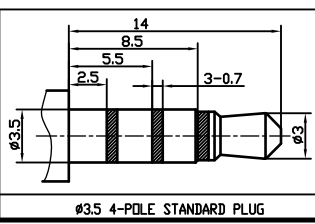

120~315	±0.55	DWN	王安盛	DATE	2022.12.07	SCALE 2.5/1	NAME Ø3.5mm PHONE JACK
30~120	±0.45	DSND	王安盛	DATE	2022.12.07		
6~30	±0.35	CHKD	李阮龍	DATE	2022.12.07	PROJECTION ⊕	CAT. NO. KMPJW3700RSGBCG1R
BELOW 6	±0.25	APVD	郭遠峰	DATE	2022.12.07		
DIMENSION	TOLERANCE	KUNMING ELECTRONICS CO.,LTD.				DWN.NO. A-PJW3700RSGBCG1R	1/1 001