
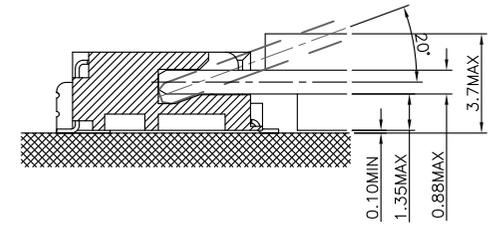


1	RELEASE	JACK WU	2015/01/21
2	NEW FORM	JACK WU	2019/08/21
3	UPDATE SPEC DURABILITY	RON LO	2023/04/20

SPECIFICATION:

1. Current Rating: 0.5A
2. Voltage Rating: 50V DC
3. Contact Resistance: 55mΩ max.
4. Insulation Resistance: 500MΩ Min.
5. Dielectric Withstanding Voltage : 300VAC
6. Durability : 60 Cycle
7. Insertion Force : 20N Max.
8. Extraction Force : 25N Max.
9. Storage Temperature Range : -40°C~+85°C
10. Operating Temperature Range : -40°C~+85°C
11. Recommended IR Reflow Temperature : 260°C

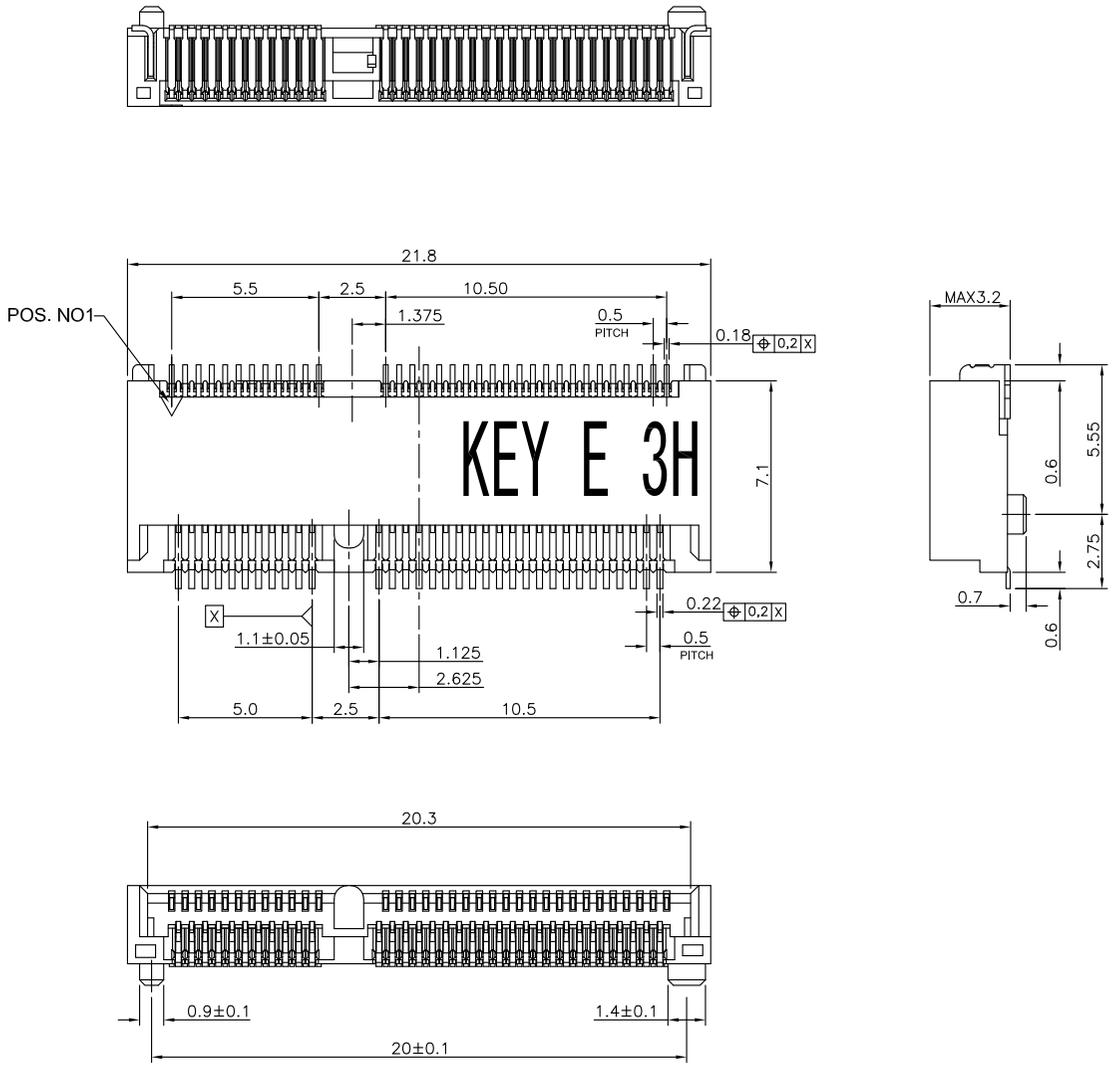


3	SOLDER PEG	COPPER ALLOY, NICKEL PLATED
2	TERMINAL	COPPER ALLOY, GOLD PLATED OVER NICKEL
1	HOUSING	HIGH TEMPERATURE THERMO PLASTIC UL94V-0
NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED : X. ± 0.30 X.X ± 0.20 X.XX ± 0.10 ANGLES ± 3°
SCALE 1 : 1		KUNMING ELECTRONICS CO.,LTD. NAME M.2 Horizontal, E Key 0.5mm Pitch, 67Pin 3.0H PRODUCT No. KMCX4M30E11 DRAWING No.
SHEET 1/4		
SIZE A4		
CUSTOMER DRAWING		
DWN JACK WU 20150121		
CHK PETER WANG 20150121		
APVD SIMON LI 20150121		



1	RELEASE	JACK WU	2015/01/21
2	NEW FORM	JACK WU	2019/08/21
3	UPDATE SPEC DURABILITY	RON LO	2023/04/20

NOTES : Accessories Opinion SCREW and NUTS Available for M.2


1.NUT
P/N : M2NUT-02
MATERIAL : COPPER Alloy
PLATING : Sn

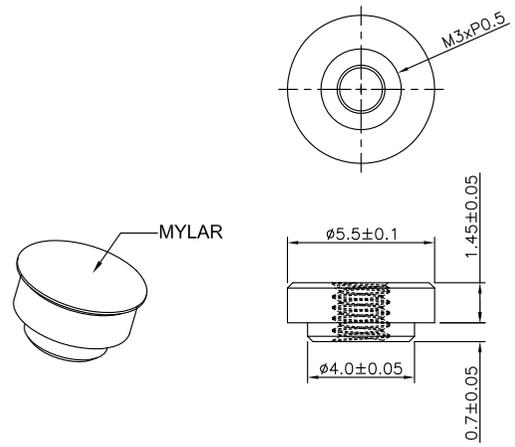

2.SCREW
P/N : M2SCREW-01
MATERIAL : COPPER Alloy
PLATING : Sn

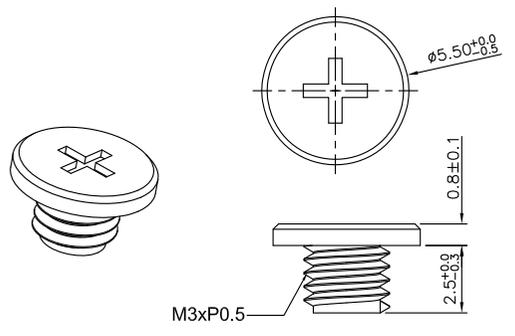

RECOMMEND NUT P.C.BOARD LAYOUT



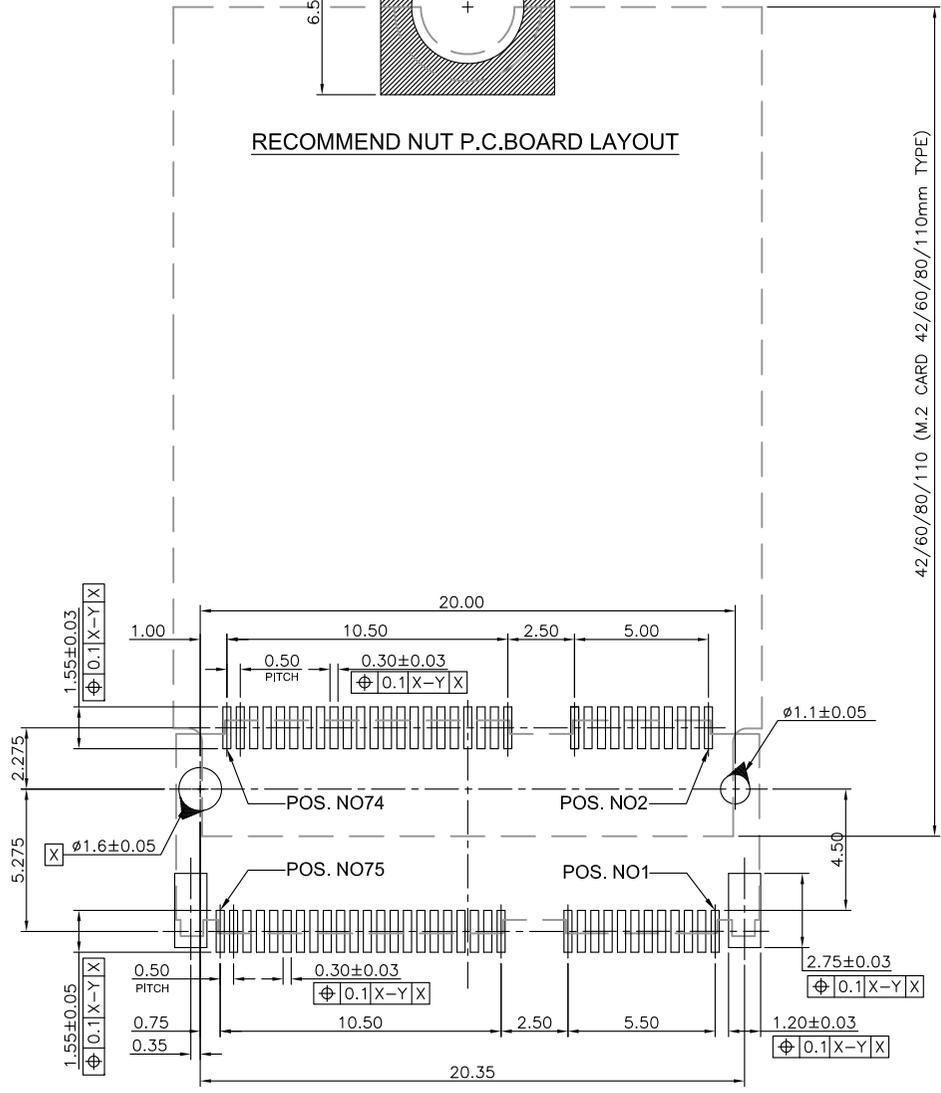


RECOMMEND P.C.BOARD LAYOUT

NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm		KUNMING ELECTRONICS CO.,LTD.
TOLERANCES UNLESS OTHERWISE SPECIFIED :		
X. ± 0.30		NAME
X.X ± 0.20		
X.XX ± 0.10		
ANGLES ± 3°		
SCALE	DWN 20150121	M.2 Horizontal, E Key 0.5mm Pitch, 67Pin 3.0H
1 : 1	JACK WU	
SHEET	CHK 20150121	PRODUCT No. KMCX4M30E11
2/4	PETER WANG	
SIZE	APVD 20150121	DRAWING No.
A4	SIMON LI	
CUSTOMER DRAWING		

1	NEW FORM	JACK WU	2019/08/21
2	UPDATE PACKAGE 1200PCS/REEL	JACK WU	2021/02/04
3	UPDATE SPEC DURABILITY	RON LO	2023/04/20

DIRECTION OFF TOP OF REEL

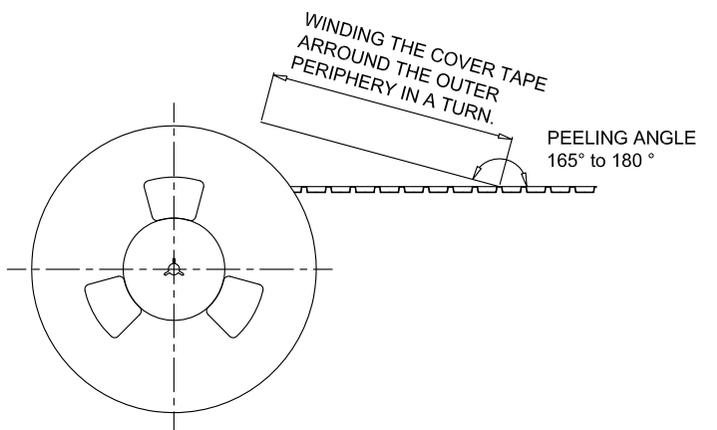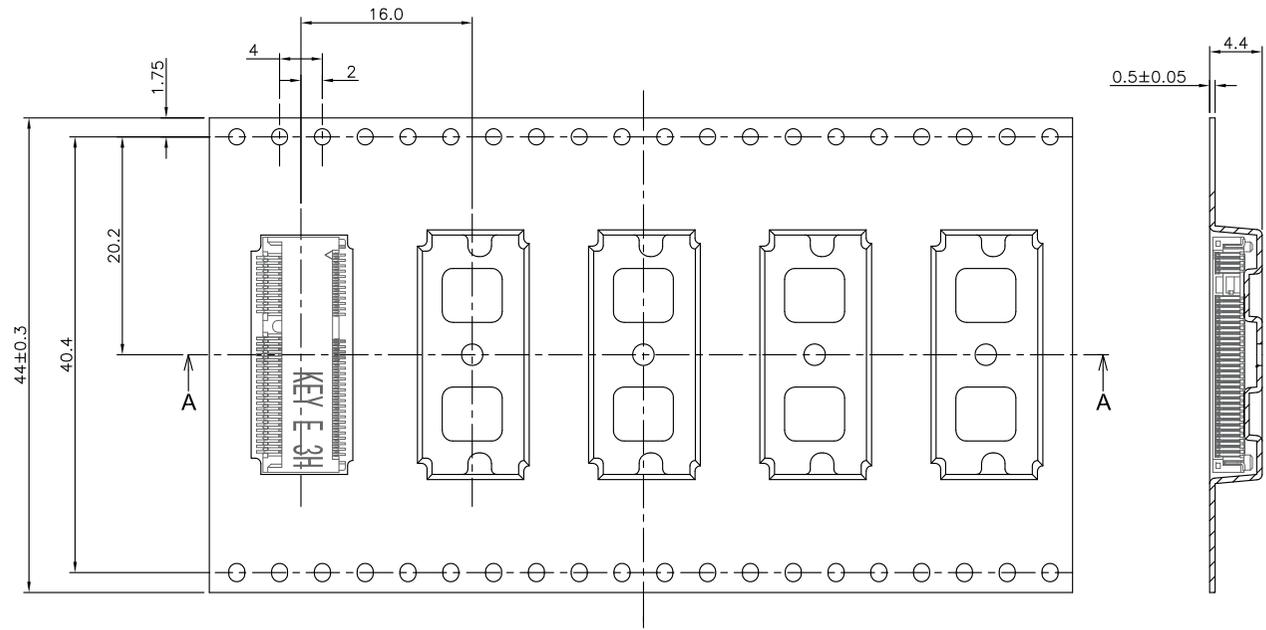

SECT A-A

NOTES :

- 1.The direction of each connector on a emboss is referred to this drawing.
2. General tolerance : ± 0.5 , $\pm 3^\circ$
3. Packaged in emboss tape and plastic reel 1,200 PCS per reel.

NO.	PART NAME	DESCRIPTION
DIMENSIONS : mm		TOLERANCES UNLESS OTHERWISE SPECIFIED :
		X. ± 0.30
		X.X ± 0.20
		X.XX ± 0.10
		ANGLES $\pm 3^\circ$
SCALE	DWN	20150121
1 : 1	JACK WU	
SHEET	CHK	20150121
4/4	PETER WANG	
SIZE	APVD	20150121
A4	SIMON LI	
CUSTOMER DRAWING		PRODUCT No. KMCX4M30E11
		DRAWING No.

KUNMING ELECTRONICS CO.,LTD.

NAME

M.2 Horizontal, E Key 0.5mm Pitch, 67Pin 3.0H

PRODUCT No. KMCX4M30E11

DRAWING No.