

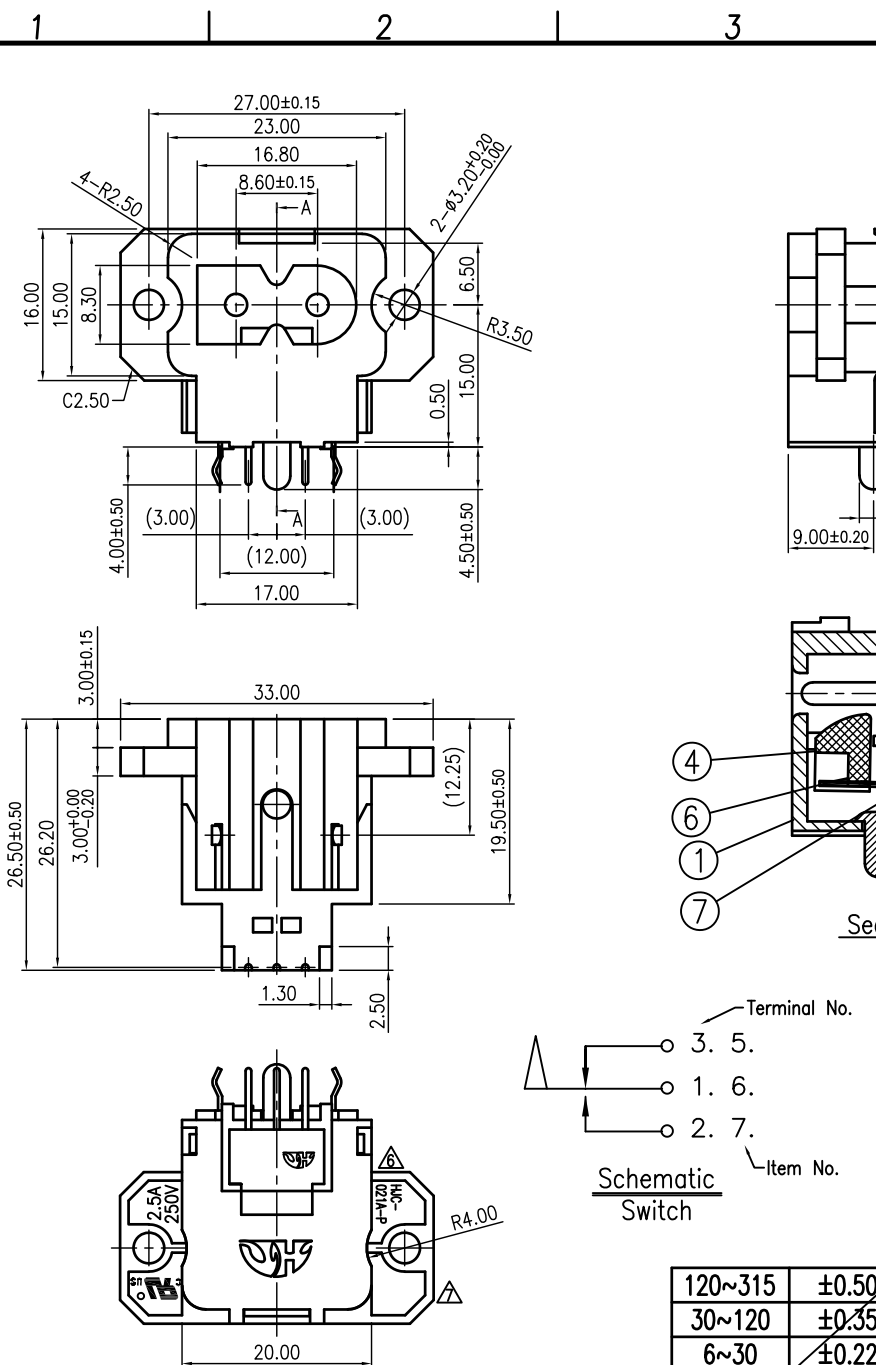





A
B
C
D
E

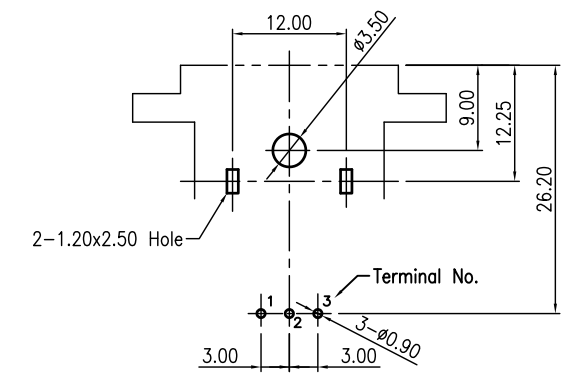

REVISIONS					
LTR	DESCRIPTION	DATE	REV.	CHKD.	APVD.
△x1	To change the mark of housing (ECR C03150547)	2015.07.06	陳衛兵	張啟濤	陳宗碧
△x2	Cancel the CSA mark (CSA Reference No)ECRC03180591	2019.06.11	李阮龍	李阮龍	李阮龍



Note:
Approved Standard: UL&cUL FILE NO.E95834

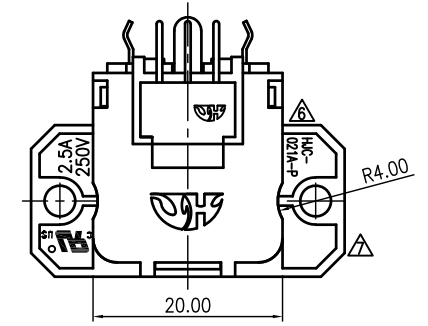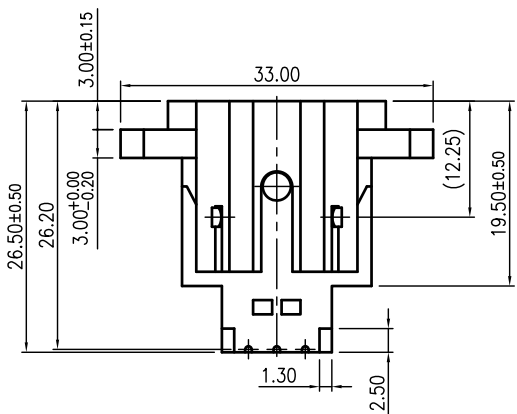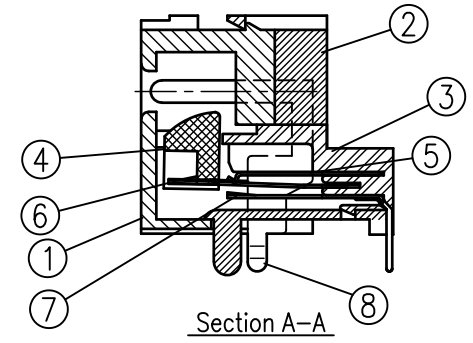

8	PIN	2	C2680	t=0.40	MBCu2μm-Sn3μm
7	SHUNT SPRING(B)	1	C2680	t=0.30	MBCu2μm-Ag0.6μm
6	TIP SPRING	1	C5191	t=0.30	MBCu2μm-Ag0.6μm
5	SHUNT SPRING(A)	1	C5191	t=0.30	MBCu2μm-Ag0.6μm
4	SEPARATOR	1	PBT(SHINKONG D202)		Black
3	BASE	1	PPO(SABIC RESIN)UL 94V-0		Black
2	COVER	1	PPO(SABIC RESIN)UL 94V-0		Black
1	HOUSING	1	PBT+30%GF(SHINKONG D202G30)UL 94V-0		Black

LTR	PART NAME	Q'TY	MATERIAL	REMARK
120~315	±0.50	DWN	JAER	DATE 2003.12.08
30~120	±0.35	DSND	SHIAN	DATE 1992.10.07
6~30	±0.22	CHKD	蘇建源	DATE 2008.12.09
BELOW 6	±0.16	APVD	龔雲輝	DATE 2008.12.09
DIMENSION TOLERANCE				KUNMING ELECTRONICS CO.,LTD.
SCALE 1.25/1				NAME AC POWER SOCKET
PROJECTION				CAT. NO. HJC-021A-P
UNIT:mm				DWN.NO. A-021A-P
				1/1
				H

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.30 ANGLES:±5°

The raw material specified by Sony should meet SS-00259 requirement of the latest version. When such material is used, it should be supplied by Sony designated suppliers.