

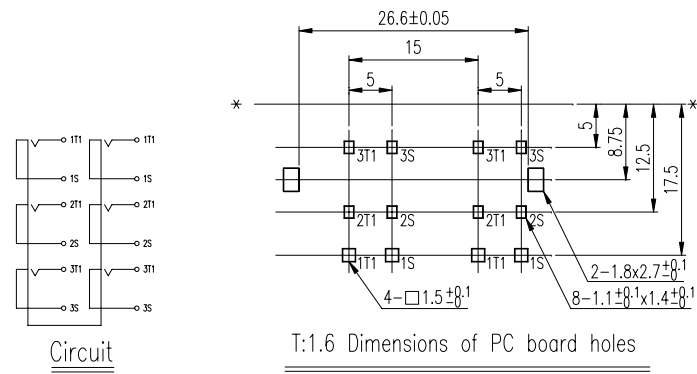
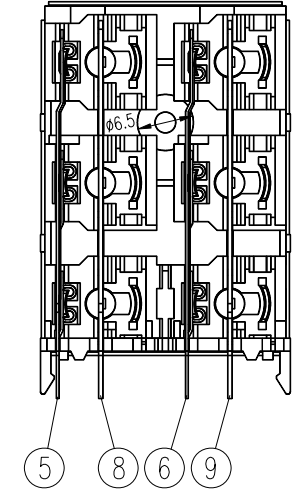
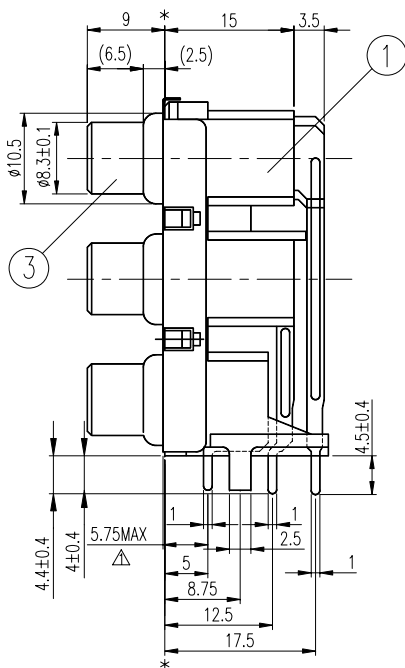


REVISIONS				
LTR	DESCRIPTION	DATE	REVISED	APPROVED
△×1	應客戶要求,加標五金端子到封口片的尺寸	2003.09.13	Chillbon	KUNG
△×1	更改鍍層參照顏色料號對照表.	2003.09.23	JAER	KUNG

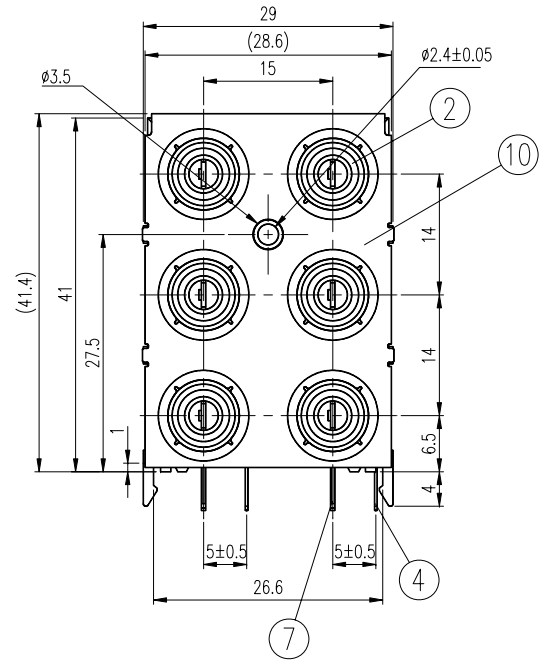

T:1.6 Dimensions of PC board holes
Tolerance : ±0.1(Printed-bottom View)

10	SEALED PLATE	1	C2680	t0.2	
9	CENTER CONTACT	2	C2680	t0.5	(1T1)
8	CENTER CONTACT	2	C2680	t0.5	(2T1)
7	CENTER CONTACT	2	C2680	t0.4	(3T1)
6	EARTH FITTING	2	C2680	t0.3	(1S)
5	EARTH FITTING	2	C2680	t0.3	(2S)
4	EARTH FITTING	2	C2680	t0.3	(3S)
3	OUTER CONTACT	6	C2680	t0.3	
2	WASHER	6	POM		UL-94HB
1	HOUSING	1	ABS (BLACK)		UL-94HB

△Please refer color combination list.

LTR	PART NAME	QTY	MATERIAL	REMARK
DWN	CHILLBON	DATE	2003.09.13	SCALE
DSND	JAER	DATE	2003.09.23	PROJECTION
CHKD	DAVID	DATE	2003.09.23	
APVD	KUNG	DATE	2003.09.23	

NAME
PIN JACK
CAT. No.
HSP-266A02V-

KUNMING ELECTRONICS CO., LTD.

DWN. No.
A-266A02V
1/1
C

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:±0.3 ANGLES:±5°